


SB-RB2 Serie leggera - Light duty

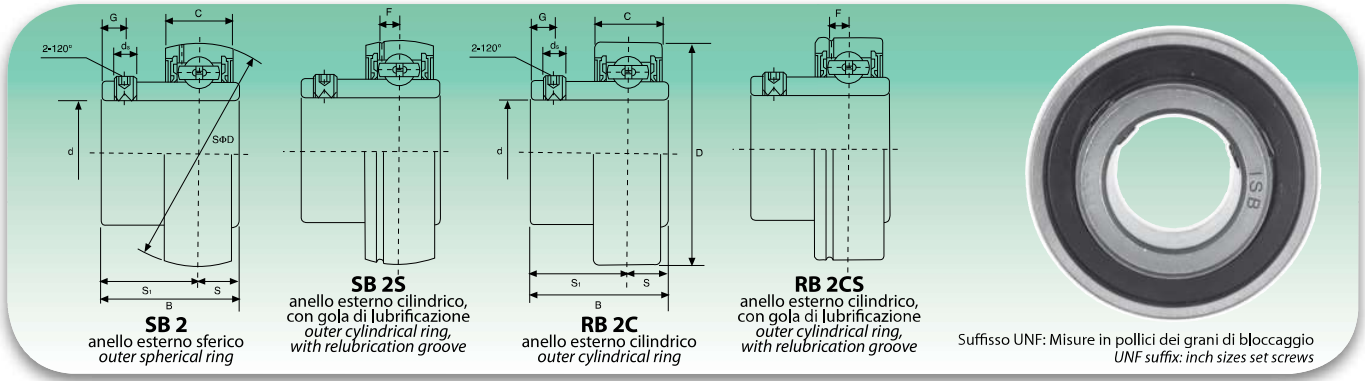

| Tipo Type | Dimensioni - Dimensions | | | | | | | | | Coefficients di carico (N) Load ratings (N) | | Peso Weight kg |
|-----------------|-------------------------|--------|--------|--------|-------|----------------|----------------|-------|-------|--|---|----------------------|
| | d | D | B | C | S | S ₁ | d _s | G | F | Dinamico C Dynamic C | Statico C ₀ Static C ₀ | |
| | mm/inch | | | | | | | | | | | |
| SB-RB201 | 12 | 40 | 22 | 12 | 6 | 16 | M5x0,8 | 4,5 | 3,7 | 9200 | 4480 | 0,10 |
| SB-RB201-8 | 3/4 | 1,5748 | 0,8661 | 0,4724 | 0,236 | 0,630 | 10-32UNF | 0,177 | 0,146 | | | 0,10 |
| SB-RB202 | 15 | 40 | 22 | 12 | 6 | 16 | M5x0,8 | 4,5 | 3,7 | 9200 | 4480 | 0,10 |
| SB-RB202-9 | 5/8 | 1,5748 | 0,8661 | 0,4724 | 0,236 | 0,630 | 10-32UNF | 0,177 | 0,146 | | | 0,10 |
| SB-RB202-10 | 5/8 | 1,5748 | 0,8661 | 0,4724 | 0,236 | 0,630 | 10-32UNF | 0,177 | 0,146 | | | 0,10 |
| SB-RB203 | 17 | 40 | 22 | 12 | 6 | 16 | M5x0,8 | 4,5 | 3,7 | 9200 | 4480 | 0,09 |
| SB-RB203-11 | 11/16 | 1,5748 | 0,7520 | 0,4724 | 0,256 | 1/4-28UNF | 0,189 | 0,531 | 0,146 | | | 0,09 |
| SB-RB204 | 20 | 47 | 25 | 14 | 7 | 18 | M6x1 | 4,5 | 3,7 | 12200 | 6300 | 0,13 |
| SB-RB204-12 | 3/4 | 1,8504 | 0,9843 | 0,5512 | 0,276 | 0,709 | 1/4-28UNF | 0,177 | 0,146 | | | 0,14 |
| SB-RB205 | 25 | 52 | 27 | 15 | 7,5 | 19,5 | M6x1 | 5,5 | 3,9 | 13300 | 7460 | 0,16 |
| SB-RB205-13 | 13/16 | | | | | | | | | | | 0,19 |
| SB-RB205-14 | 7/8 | 2,0472 | 1,0630 | 0,5906 | 0,295 | 0,768 | 1/4-28UNF | 0,217 | 0,154 | | | 0,18 |
| SB-RB205-15 | 15/16 | | | | | | | | | | | 0,17 |
| SB-RB205-16 | 1 | | | | | | | | | | | 0,16 |
| SB-RB206 | 30 | 62 | 30 | 16 | 8 | 22 | M6x1 | 6 | 5,0 | 18500 | 10800 | 0,25 |
| SB-RB206-17 | 11/16 | | | | | | | | | | | 0,28 |
| SB-RB206-18 | 11/8 | 2,4409 | 1,1811 | 0,6299 | 0,315 | 0,866 | 1/4-28UNF | 0,236 | 0,197 | | | 0,26 |
| SB-RB206-19 | 13/16 | | | | | | | | | | | 0,25 |
| SB-RB206-20 | 11/4 | | | | | | | | | | | 0,24 |
| SB-RB207 | 35 | 72 | 32 | 17 | 8,5 | 23,5 | M8x1 | 6,5 | 5,7 | 24500 | 14600 | 0,38 |
| SB-RB207-20 | 11/4 | | | | | | | | | | | 0,43 |
| SB-RB207-21 | 13/16 | 2,8346 | 1,2598 | 0,6693 | 0,335 | 0,925 | 5/16-24UNF | 0,256 | 0,224 | | | 0,41 |
| SB-RB207-22 | 13/8 | | | | | | | | | | | 0,38 |
| SB-RB207-23 | 17/16 | | | | | | | | | | | 0,37 |
| SB-RB208 | 40 | 80 | 34 | 18 | 9 | 25 | M8x1 | 7 | 6,2 | 27700 | 17000 | 0,60 |
| SB-RB208-24 | 11/2 | 3,1496 | 1,3386 | 0,7087 | 0,354 | 0,984 | 5/16-24UNF | 0,276 | 0,244 | | | 0,58 |
| SB-RB208-25 | 13/16 | | | | | | | | | | | 0,60 |
| SB-RB209 | 45 | 85 | 41,2 | 19 | 10,2 | 31 | M8x1 | 8,2 | 6,4 | 31100 | 24450 | 0,8 |
| SB-RB209-26 | 13/8 | 3,3465 | 1,6220 | 0,7480 | 0,402 | 1,220 | 5/16-24UNF | 0,323 | 0,252 | | | |
| SB-RB209-27 | 113/16 | | | | | | | | | | | |
| SB-RB209-28 | 13/4 | | | | | | | | | | | |
| SB-RB210 | 50 | 90 | 43,5 | 20 | 10,9 | 32,6 | M10x1 | 9,2 | 6,5 | 35300 | 28160 | 0,8 |
| SB-RB210-29 | 113/16 | 3,5433 | 1,7126 | 0,7874 | 0,429 | 1,283 | 3/8-24UNF | 0,362 | 0,256 | | | |
| SB-RB210-30 | 17/8 | | | | | | | | | | | |
| SB-RB210-31 | 115/16 | | | | | | | | | | | |
| SB-RB210-32 | 2 | | | | | | | | | | | |
| SB-RB211 | 55 | 100 | 45,3 | 21 | 11,8 | 33,5 | M10x1 | 9,8 | 7,0 | 38100 | 30000 | 1,1 |
| SB-RB211-32 | 2 | 3,9370 | 1,7835 | 0,8268 | 0,465 | 1,319 | 3/8-24UNF | 0,386 | 0,276 | | | |
| SB-RB211-33 | 21/16 | | | | | | | | | | | |
| SB-RB211-34 | 23/8 | | | | | | | | | | | |
| SB-RB211-35 | 23/16 | | | | | | | | | | | |
| SB-RB212 | 60 | 110 | 53,7 | 22 | 14,9 | 38,8 | M10x1 | 9,8 | 7,6 | 41500 | 32730 | 1,3 |
| SB-RB212-36 | 21/4 | 4,3307 | 2,1142 | 0,8661 | 0,587 | 1,528 | 3/8-24UNF | 0,386 | 0,299 | | | |
| SB-RB212-37 | 21/16 | | | | | | | | | | | |
| SB-RB212-38 | 23/8 | | | | | | | | | | | |
| SB-RB212-39 | 21/16 | | | | | | | | | | | |

Disponibile in acciaio inox AISI 440C - Available stainless steel AISI 440C