


SVĚRNÁ POUZDRA

45HH139

(není samostředící)

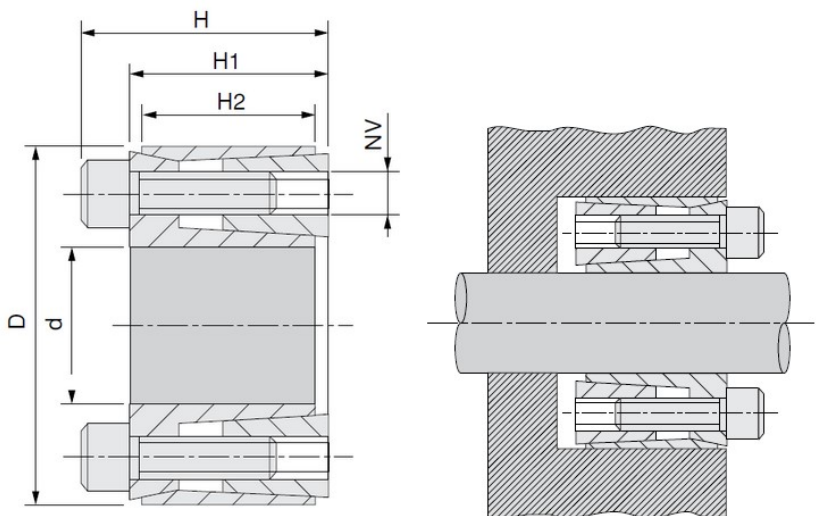

Materiál : ocel C45 E

Kód	Rozměry					Šroub			Vytačovací závit		Krutící moment		Povrchové tlaky	
	d	D	H	H1	H2	NV	Tv (Nm)	Počet	NV	Počet	Mt (Nm)	Ta (kN)	Hřidel Pa (N/mm ²)	Náboj Pm (N/mm ²)
45HH139	18	40	24	18	14,7	M6x16	17	4	M6x16	2	165	18	185	83
	19	41	24	18	14,7	M6x16	17	4	M6x16	2	174	18	176	81
	20	42	24	18	14,7	M6x16	17	4	M6x16	2	183	18	167	79
	24	46	24	18	14,7	M6x16	17	6	M6x16	3	329	27	209	109
	25	47	24	18	14,7	M6x16	17	6	M6x16	3	343	27	200	106
	28	50	24	18	14,7	M6x16	17	6	M6x16	3	384	27	179	100
	30	52	24	18	14,7	M6x16	17	6	M6x16	3	412	27	167	96
	35	57	28	22	18	M6x18	17	6	M6x18	3	480	27	117	78
	38	60	28	22	18	M6x18	17	8	M6x18	4	695	36,5	143	91
	40	62	28	22	18	M6x18	17	8	M6x18	4	732	36,5	136	88
	42	70	36	28	23,5	M8x25	42	8	M8x25	4	1427	68	185	111
	45	73	36	28	23,5	M8x25	42	8	M8x25	4	1529	68	172	106
	48	76	36	28	23,5	M8x25	42	8	M8x25	4	1631	68	161	102
	50	78	36	28	23,5	M8x25	42	8	M8x25	4	1699	68	155	99
	55	83	36	28	23,5	M8x25	42	8	M8x25	4	1869	68	141	93
	60	88	36	28	23,5	M8x25	42	8	M8x25	4	2039	68	129	88
70	105	45	35	30	M10x30	83	8	M10x30	4	3759	107	137	91	
80	115	45	35	30	M10x30	83	8	M10x30	4	4296	107	120	83	

● ISB