



VODÍČÍ PROFILY

STANDARD

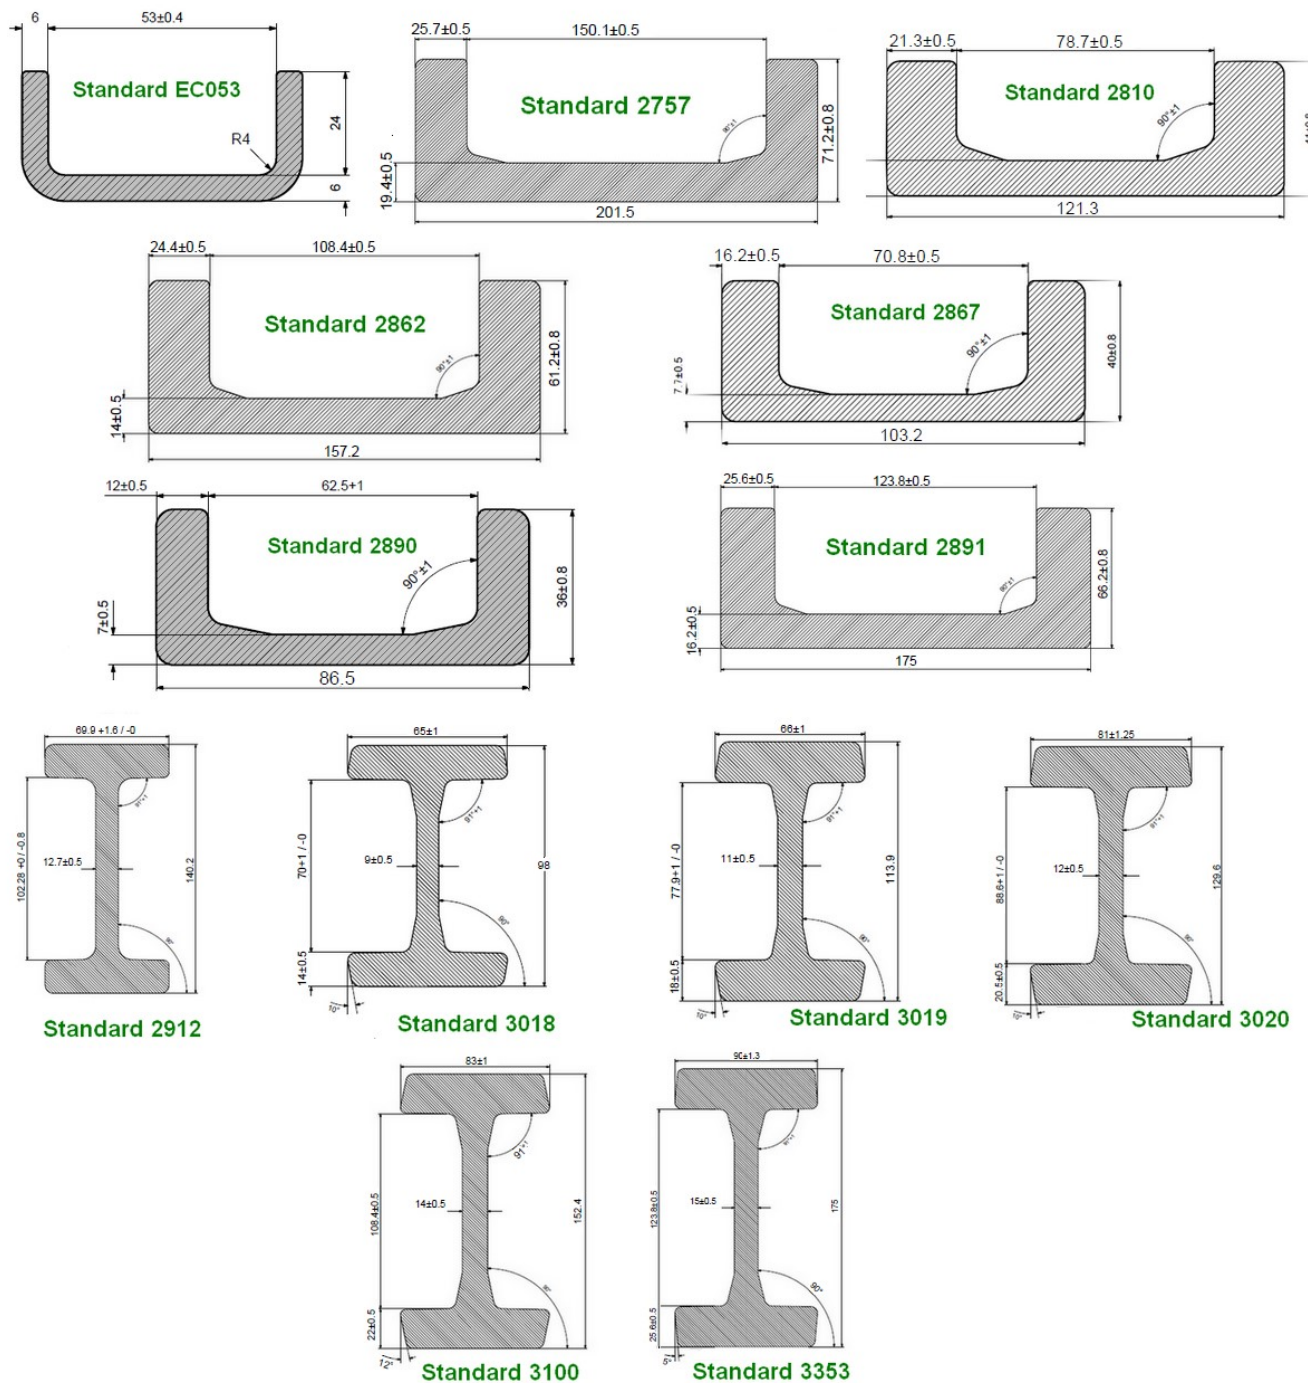

JUMBO C - profil


Materiál: S355



Profil	(mm)						Váha (kg / m)	Ex (mm)	Ey (mm)	Lx (cm4)	Ly (cm4)	Wx (cm3)	Wy (cm3)
	C	H	B	S	D	A							
FC165	165.4	230	57.5	18	80	38.5	53.3	19.9	115	4410.5	174.6	383.5	87.5
FC190	190.4	255	77	22	80	53	73.7	25.9	127.5	7631.6	434.2	598.6	167.7
FC220	220.4	295	85	20	125	62.5	86.1	29	147.5	12633	672.0	856.4	231.7
FC250	250.4	344	94	26.5	125	65.5	122.8	32.4	172	23372	1117.4	1358.8	344.9
FC280	280.4	394	114	26.5	125	85.5	161.85	40.8	157	42474	2354.8	2156	577

JUMBO I - profil

Materiál: S355



Profil	(mm)								Váha (kg / m)	Ex (mm)	Ey (mm)	Lx (cm4)	Ly (cm4)	Wx (cm3)	Wy (cm3)
	C	H	B	S	D	B1	F								
FM165	165.4	230	95	16	70	39.5	1	72.7	47.5	115	6894	472	600	99	
FM190	190.4	255	130	20	70	55	2	100.4	65	127.5	12003	1203	941	185	
FM220	220.4	295	150	20	90	65	2	126.3	75	147.5	20991	2119	1423	283	
FM250	250.4	345	160	25	90	67.5	2	172.7	80	171.5	37838	3274	2206	409	
FM280	280.4	375	190	30	120	80	2	212.8	95	187.5	55163	5492	2942	578	