


# KLOUBY A KLOBOVÉ HŘÍDELE

**HA, HBA** ( pro vysoké otáčky )

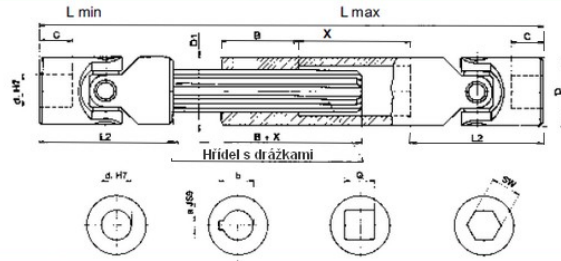

(DIN 808)


Typ	d [mm]	D [mm]	L2 [mm]	C [mm]	Lmin [mm]	Lmax [mm]	X [mm]	B [mm]	a [mm]	b [mm]	Q [mm]	SW [mm]	Profil hřídele	D1 [mm]	kg
GU03HA	10	22	48	12	140	170	30	30	3	11,4	10	10	11 x 14 Z6	22	0,310
					160	200	40								0,360
					180	240	60								0,380
					230	330	100								0,500
GU04HA	12	25	56	13	160	190	30	40	4	13,8	12	12	13 x 16 Z6	26	0,500
					180	225	45								0,560
					200	270	70								0,620
					220	300	80								0,670
					250	355	105								0,760
					280	420	140								0,840
					300	450	150								0,900
GU05HA	14	28	60	14	170	200	30	40	5	16,3	14	14	13 x 16 Z6	29	0,620
					180	220	40								0,640
					200	260	60								0,720
					220	300	80								0,780
					250	350	100								0,870
					280	420	140								0,960
					300	450	150								1,030
					350	550	200								1,170
400	650	250	1,330												
GU1HA	16	32	68	16	190	220	30	40	5	18,3	16	16	16 x 20 Z6	32	0,900
					210	250	40								0,980
					240	320	80								1,100
					250	350	100								1,140
					275	390	115								1,240
					300	430	130								1,330
					380	590	210								1,600
GU2HA	18	36	74	17	230	280	50	40	6	20,8	18	18	18 x 22 Z6	37	1,350
					250	320	70								1,460
					270	370	100								1,550
					290	400	110								1,660
					300	415	115								1,710
					400	620	220								2,230
GU3HA	20	42	82	18	250	300	50	45	6	22,8	20	20	21 x 25 Z6	42	1,990
					270	340	70								2,120
					290	380	90								2,250
					320	440	120								2,460
					380	560	180								2,860
					420	640	220								3,130
500	800	300	3,660												

# KLOUBY A KLOUBOVÉ HŘÍDELE

HA, HBA ( pro vysoké otáčky )



(DIN 808)

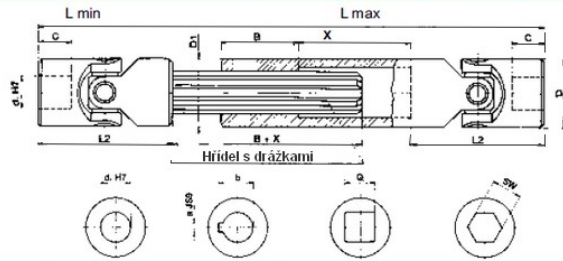

Typ	d [mm]	D [mm]	L2 [mm]	C [mm]	Lmin [mm]	Lmax [mm]	X [mm]	B [mm]	a [mm]	b [mm]	Q [mm]	SW [mm]	Profil hřídele	D1 [mm]	kg
GU4HA	22	45	95	22	250	280	30	45	6	24,8	22	22	23 x 28 Z6	47	2,350
					270	320	50								2,510
					290	350	60								2,670
					330	430	100								3,000
					350	470	120								3,160
					470	710	240								4,130
GU5HA	25	50	108	26	295	345	50	45	8	28,3	25	25	26 x 32 Z6	52	3,390
					310	375	65								3,520
					350	450	100								3,920
					380	500	120								4,200
					420	590	170								4,590
					460	660	200								4,980
GU6HA	30	58	122	29	500	745	245	50	8	33,3	30	30	32 x 38 Z8	58	5,370
					330	380	50								4,900
					350	420	70								5,170
					370	455	85								5,420
					400	510	110								5,850
					450	620	170								6,480
GU7HA	35	70	140	35	**	**	**	70	10	38,3	**	**	36 x 42 Z8	70	-
GU8HA	40	80	160	40	**	**	**	80	12	43,3	**	**	42 x 48 Z8	80	-
GU9HA	50	95	190	50	**	**	**	90	14	53,8	**	**	46 x 54 Z8	95	-

Typ	d [mm]	D [mm]	L2 [mm]	C [mm]	Lmin [mm]	Lmax [mm]	X [mm]	B [mm]	a [mm]	b [mm]	Q [mm]	SW [mm]	Profil hřídele	D1 [mm]
GU04HBA	12	22	62	18	**	**	**	30	4	13,8	10	10	11 x 14 Z6	22
GU1HBA	16	25	74	21	**	**	**	40	5	18,3	12	12	13 x 16 Z6	26
GU3HBA	20	32	86	24	**	**	**	40	6	22,8	16	16	16 x 20 Z6	32
GU5HBA	25	42	108	31	**	**	**	45	8	28,3	20	20	21 x 25 Z6	42
GU6HBA	30	50	132	38	**	**	**	45	8	33,3	25	25	26 x 32 Z6	52
GU8HBA	40	70	166	47	**	**	**	70	12	43,3	**	**	36 x 42 Z8	70