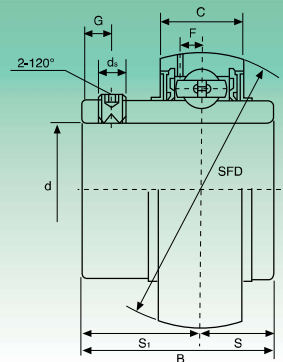


UCX Serie media - Medium duty


Suffisso UNF: Misure in pollici dei grani di bloccaggio
UNF suffix: inch sizes set screws

Tipo Type	Dimensioni - Dimensions									Coefficients di carico (N) Load ratings (N)		Peso Weight kg
	d	D	B	C	S	S ₁	G	d _s	F	Dinamico C Dynamic C	Statico C ₀ Static C ₀	
UCX05	25	62	38,1	19	15,9	22,2	5	M6x1	5,0			
UCX05-13	1 ³ / ₁₆											
UCX05-14	7 ¹⁶											
UCX05-15	1 ⁵ / ₁₆	2,4409	1,5000	0,7480	0,626	0,874	0,197	¼-28UNF	0,197	18525	10735	0,39
UCX05-16	1											
UCX06	30	72	42,9	20	17,5	25,4	7	M8x1	5,7			
UCX06-17	1 ¹ / ₁₆											
UCX06-18	1 ³ / ₁₆											
UCX06-19	1 ³ / ₁₆	2,8346	1,6890	0,7874	0,689	1,000	0,276	5 ¹⁶ -24UNF	0,224	24415	14630	0,68
UCX06-20	1 ¹ / ₄											
UCX07	35	80	49,2	21	19	30,2	8	M8x1	6,2			
UCX07-21	1 ³ / ₁₆											
UCX07-22	1 ³ / ₁₆											
UCX07-23	1 ³ / ₁₆	3,1496	1,9370	0,8268	0,748	1,189	0,315	5 ¹⁶ -24UNF	0,244	27645	16910	0,82
UCX08	40	85	49,2	22	19	30,2	8	M8x1	6,4			
UCX08-24	1 ¹ / ₂											
UCX08-25	1 ³ / ₁₆	3,3465	1,9370	0,8661	0,748	1,189	0,315	5 ¹⁶ -24UNF	0,252	32395	20235	0,93
UCX09	45	90	51,6	24	19	32,6	10	M10x1	6,5			
UCX09-26	1 ⁵ / ₁₆											
UCX09-27	1 ¹¹ / ₁₆											
UCX09-28	1 ³ / ₄	3,5433	2,0315	0,9449	0,748	1,283	0,394	3 ¹⁶ -24UNF	0,256	33345	22135	1,00
UCX10	50	100	55,6	25	22,2	33,4	10	M10x1	7,0			
UCX10-30	1 ⁷ / ₁₆											
UCX10-31	1 ⁹ / ₁₆											
UCX10-32	2	3,9370	2,1890	0,9843	0,874	1,315	0,394	3 ⁸ -24UNF	0,276	41230	27930	1,35
UCX11	55	110	65,1	27	25,4	39,7	10	M10x1	7,6			
UCX11-33	2 ¹ / ₁₆											
UCX11-34	2 ¹ / ₁₆											
UCX11-35	2 ³ / ₁₆											
UCX11-36	2 ¹ / ₄	4,3307	2,5630	1,0630	1,000	1,563	0,394	3 ⁸ -24UNF	0,299	49780	34390	1,90
UCX12	60	120	65,1	28	25,4	39,7	10	M10x1	8,5			
UCX12-38	2 ³ / ₈											
UCX12-39	2 ⁷ / ₁₆	4,7244	2,5630	1,1024	1,000	1,563	0,394	3 ⁸ -24UNF	0,335	54340	38095	2,27
UCX13	65	125	74,6	29	30,2	44,4	12	M12x1,5	8,9			
UCX13-40	2 ¹ / ₂											
UCX13-41	2 ⁹ / ₁₆	4,9213	2,9370	1,1417	1,189	1,748	0,472	7 ¹⁶ -20UNF	0,350	59090	41895	2,45
UCX14	70	130	77,8	30	33,3	44,5	12	M12x1,5	9,2			
UCX14-42	2 ³ / ₈											
UCX14-43	2 ¹¹ / ₁₆											
UCX14-44	2 ³ / ₄	5,1181	3,0630	1,1811	1,311	1,752	0,472	7 ¹⁶ -20UNF	0,362	64030	45885	2,47
UCX15	75	140	82,6	32	33,3	49,3	12	M12x1,5	9,5			
UCX15-45	2 ¹³ / ₁₆											
UCX15-46	2 ⁷ / ₈											
UCX15-47	2 ¹⁵ / ₁₆											
UCX15-48	3	5,5118	3,2520	1,2598	1,311	1,9409	0,472	7 ¹⁶ -20UNF	0,374	69065	50350	3,11
UCX16	80	150	85,7	34	34,1	51,6	12	M12x1,5	10,2			
UCX16-49	3 ¹ / ₁₆											
UCX16-50	3 ¹ / ₈											
UCX16-51	3 ³ / ₁₆	5,9055	3,3740	1,3386	1,343	2,031	0,472	7 ¹⁶ -20UNF	0,402	79800	58805	3,79
UCX17	85	160	96	36	39,7	56,3	12	M12x1,5	11,2			
UCX17-53	3 ⁵ / ₁₆											
UCX17-55	3 ¹ / ₄	6,2992	3,7795	1,4173	1,5630	2,217	0,472	1 ² -20UNF	0,441	91295	67925	4,82
UCX18	90	170	104	39	42,9	61,1	14	M14x1,5	10,5			
UCX18-56	3 ³ / ₈											
UCX18-57	3 ¹ / ₂	6,6929	4,0945	1,5354	1,689	2,406	0,511	5 ¹⁶ -18UNF	0,413	103550	77805	5,51
UCX20	100	190	117,5	44	49,2	68,3	16	M16x1,5	11,3			
UCX20-58	3 ¹³ / ₁₆											
UCX20-59	3 ⁷ / ₈											
UCX20-60	3 ¹⁵ / ₁₆											
UCX20-61	4											
UCX20-62	4	7,4803	4,6260	1,7323	1,937	2,689	0,630	5 ⁸ -18UNF	0,445	126350	99750	8,95
UCX20-64	4											